


## 5050 SMD LED Waterproof LED Module Series



Judged against the performance of standard neon or fluorescent lamps, RightLEDs 5050 LED Modules are ideal for signage channel letters which provide significant energy cost reductions (less 40% than neon), easier jobsite installation (splice connector or twist-on wire connector and 3M double-faced sticking tape), free maintenance and more consistent brightness.

Customer segments: Retail, restaurant, hospital, grocery and casino

Part Number: RFT3535-4X5050

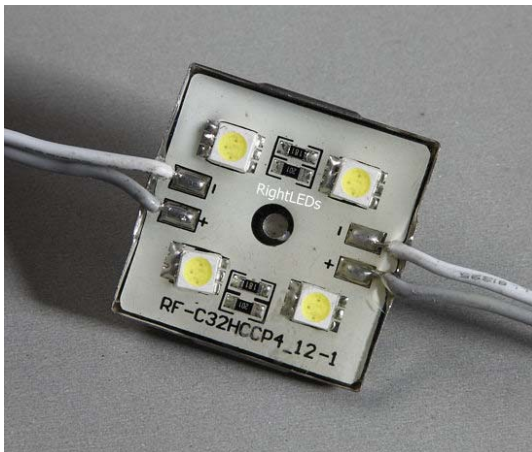

### Features

- **Highest Brightness**

5050 SMD LED Modules have best brightness among LED modules

- **Easy Installation**

LED Modules can be easily installed with 3M double-sided sticking tape and connectors.

- **Extended Life**

LED Modules have a life time of more than 50,000 hours.

- **Totally waterproof**

With IP67 protection degree, LED Modules can operate normally in cloudy, rainy, desert, and snowy weather conditions and pool. The LEDs are totally covered by resin.

- **Friendly environment**

Pb free. With CE/RoHS/SGS certificate, Waterproof LED Modules are up to 60% more energy efficient than neon.

### • Safe Application

Low voltage DC12V, safety and stable. Free maintenance

## Specification

Dimension	L35XW35XH4mm				
LED No	4 pcs 5050 SMD LED				
Voltage	Input 12VDC				
View angle	150 degree				
Current	60mA	60mA	60mA	60mA	60mA
Watts	1.44	1.44	1.44	1.44	1.44
Lumen	<b>80</b>	<b>12.6</b>	<b>43.2</b>	<b>15</b>	<b>25.6</b>
Cover	Stainless steel				
Life	50,000 hrs. Lumen Maintenance:>95%@1,000hrs				
Color	White 3500~13000k	Blue	Green	Yellow	Red
Operation Temperature	-40°C - 60°C (-40°F ~140°F)				
Certificate	CE:BTRE0708181359 / RoHS: BTRS0708310889				
Warranty	36 months				
Weight	12g/pc.720g/60pcs/bag				
IP	IP67 The PCB be covered by resin.				
Part No	RFT3535-4W5050	RFT3535-4B5050	RFT3535-4G5050	RFT3535-4Y5050	RFT3535-4R5050

## Mechanical Dimension

